

General Sewing Instructions and Information

Carefully read ALL instructions before beginning project.

See pattern pieces for seam allowances.

Do not cut pattern sheet. Trace onto tracing paper each pattern piece as needed. Be sure to mark your tracing with grain lines, fold lines and other information as given on pattern piece. These may be stored in small zipper seal bags inside your pattern. Label carefully and you will eliminate this step the next time you use your pattern.


Check pattern pieces for correct fit. If the child you are sewing for always wears a certain size it is still important to check the fit. Ready to wear clothing and pattern companies use various standards and this will eliminate disappointment later. Adjust pattern pieces as necessary. It is always a good idea to make a test garment when using a pattern for the first time before selecting expensive fabrics. You may use leftover or inexpensive fabrics for your test garment. I have put many an old bed sheet to use for test garments!

With Nap and Without Nap: These terms refer to the fabrics texture or printed design. Fabrics with a texture that requires the pattern pieces to all be cut in one direction are referred to as fabrics "With Nap". Corduroy is an example of fabric "With Nap". Also, printed fabrics may have an obvious one direction design. The pattern pieces should also be cut "With Nap" to keep the designs in one direction. "Without Nap" means the fabric has no texture or design which requires all of the pattern pieces to be cut in the same direction. Determine if you fabric is "With Nap" or "Without Nap" and refer to the pattern's fabric requirement listing. Often, fabric with nap will require additional yardage.

Prepare The Fabric: Fabrics not labeled pre-shrunk should be shrunk according to laundry instructions. Skipping this step is the most common reason for puckered seams. Natural fiber fabrics usually shrink a small amount. Fabrics from a combination of natural and man-made fibers may shrink a little and should also be pre-shrunk. There are differences in fabric quality. Poor quality fabrics usually shrink more and may also have significant changes in appearance after laundering. Keep this in mind when selecting fabrics. To pre-shrink fabrics, laundry the fabric according to the fabrics specifications without any detergent. Also, do not forget to pre-shrink any trims or ribbons you are using on the garment. Laundry these as you do the fabrics.

Straighten uneven fabric: Tear fabric or clip one selvage and pull a thread across fabric. Cut along this thread to be sure the fabric is cut on a crosswise thread.

The crosswise threads should be squared with the selvage. If they are not, pull fabric carefully on the bias in both directions and press.

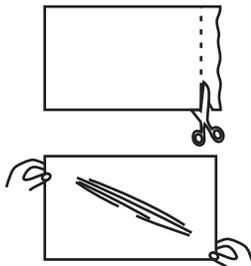


Fabric that must be squared with the selvage does not necessarily indicate poor quality. The grain is pull off as it is rolled onto the bolts.

Mark the Fabric Pieces as They are Cut: Place small piece of masking tape on right side of fabric as you remove the pattern pieces. On this tape write garment piece "FR" for Front Right and "BR" for Back Right or "R" and "L". This is especially helpful when the fabric right and wrong sides are less obvious.

Press as You Sew. Don't hurry and overlook this step. Careful pressing will make the finished garment much nicer.

Pattern Markings:

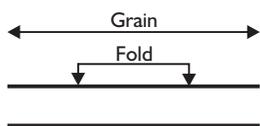

Grain Line: Place on straight grain of fabric, an even distance from selvage or fold.

Fold Line: Place on fold of fabric.

Cutting Line: For cutting. Seam allowance is included, but not printed on pattern. Pockets or small pattern pieces may have the seam lines printed and these are indicated by a dashed line.

Shaded diagram indicates **right side** of fabric.



All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying, recording or any information storage and retrieval system, without permission in writing from the publisher. The designs and patterns contained herein are meant to be used by the home sewer and not for commercial purposes.

1/4" seam allowance on all pattern pieces unless otherwise specified.

View I

Dress/Jumper - Round neckline, mid-length yoke, angel sleeves with back-wrap closing.

Pattern Layout:

Cut 2 Front Yokes (1 garment, 1 lining)

Cut 4 Back Yokes (2 garment, 2 lining)

Cut 2 Angel Sleeves

Skirt Front and Backs: See Skirt Measurement Cutting Chart below.



Cut 1 Skirt Front

Cut 2 Skirt Backs



Skirt Measurement Cutting Chart View 1, 2 and 3 (4" Hem Included)

	Skirt Front (Cut 1)	Skirt Back (Cut 2)
Size 12 mos.	18-1/4" long, 30" wide	18-1/4" long, 24" wide
Size 18 mos.	20" long, 32" wide	20" long, 25" wide
Size 24 mos.	21-5/8" long, 32" wide	21-5/8" long, 25" wide
Size 3	23-1/4" long, 36" wide	23-1/4" long, 27" wide
Size 4	25" long, 38" wide	25" long, 28" wide
Size 5	28-5/8" long, 40" wide	28-5/8" long, 29" wide
Size 6	30-1/4" long, 44" wide	30-1/4" long, 31" wide
Size 7	31-3/4" long, 44" wide	31-3/4" long, 31" wide
Size 8	33-1/4" long, 44" wide	33-1/4" long, 31" wide
Size 9	33-3/4" long, 44" wide	33-3/4" long, 31" wide
Size 10	34-1/2" long, 44" wide	34-1/2" long, 31" wide


12, 18 and 24 months

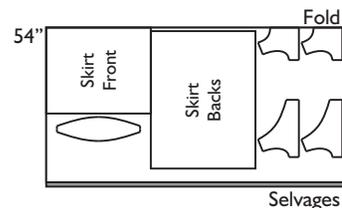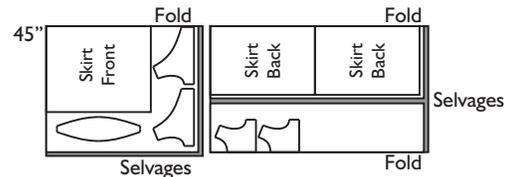


3 and 4 years

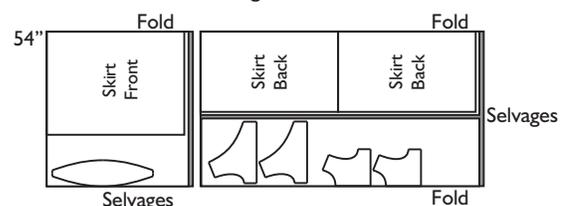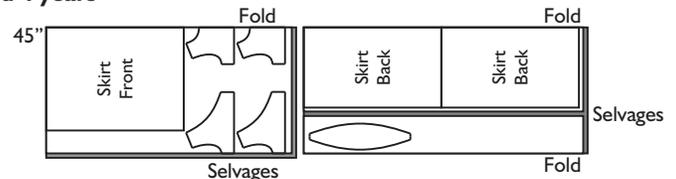

5 years

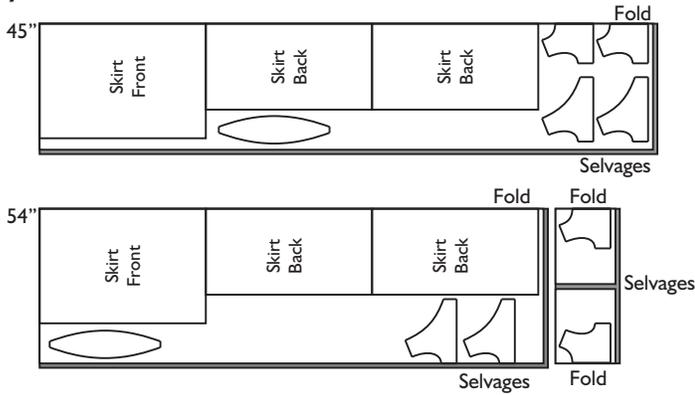


6, 7, 8, 9 and 10 years

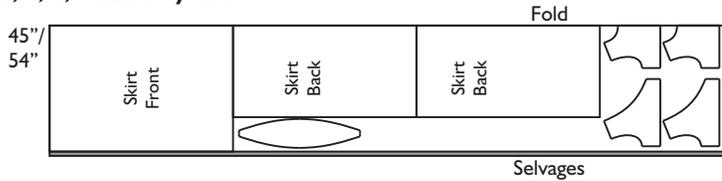


1. Shoulder Seams: Place back yokes to front yoke at shoulder seams with **right sides together**. Stitch shoulders seams and press seam allowances open. Repeat for yoke lining.

2. Yoke Lining Lower Edge: Press $\frac{1}{2}$ " to **wrong side** on lower edge of yoke lining.

3. Angel Sleeves: Fold sleeves **wrong sides together** lengthwise. Pin cut edges together. Stitch long gathering threads along top of sleeves. Do not gather $1-1\frac{1}{2}$ " from edges of sleeves.

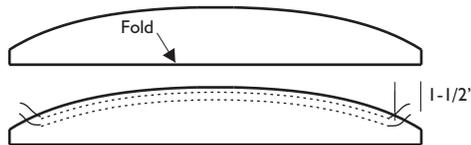


4. Pin sleeves to yoke front/back, **right sides together**, matching sleeve dot to shoulder seam and edges of sleeves to edges of yoke. Pull long threads to gather sleeve. Adjust gathers evenly and machine baste stitch sleeves to dress front/back.

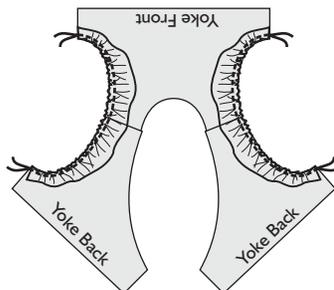


5. Stitch Lining to Yoke: Pin lining to yoke, **right sides together**, with shoulder seams and edges matching. Lower edge of lining is folded up to match seam line of yoke. Stitch neck seam beginning at back yoke edge continuing around neck to opposite back yoke edge. Stitch armholes,

underarm seam to underarm seam as shown. Clip corners. Pull back yokes through shoulders. Turn yoke **right side** out. Press.

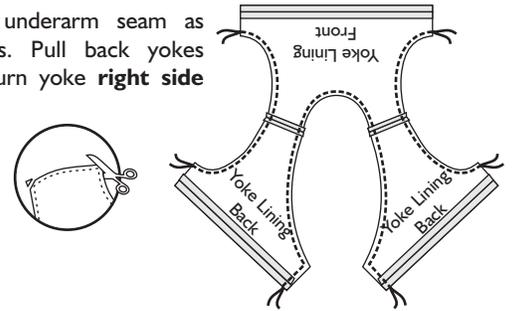

6. Yoke Side Seams: Pin sides seams, **right sides together**, with underarm seam matching and garment sides together and lining sides together. Stitch. Repeat for opposite side seam.

7. Skirt Back Facings: On edge of center skirt back, press $\frac{1}{4}$ " to **wrong side**. Stitch close to edge. Press facing under $1-1\frac{1}{4}$ ". Repeat for opposite skirt back.



8. Skirt Side Seams: Pin skirt backs to skirt front at side seams with **right sides together**. Stitch seams, press seam allowance open.

9. Sew Skirt to Yoke: Stitch three rows of long gathering threads along top of front and back skirts. Pin yoke to skirt **right sides together**, with center front, side seams and back edges aligned. (Do not catch yoke lining.) Adjust gathers and sew yoke and skirt together. Remove gathering threads and press seam up. Pin yoke lining over seam allowance. Hand stitch lining to yoke at gathered seam line.

10. Buttonholes and Buttons: Stitch buttonholes on right back yoke according to buttonhole placement on pattern. Stitch buttons on left back.

11. Hem: Press under $\frac{1}{2}$ " on lower edge of skirt. Fold up 4" and hand stitch in place.

View 2

Dress/Jumper - Princess style neckline and mid-length yoke sleeveless with back-wrap closing. Coordinating pockets.

Pattern Layout:

Cut 2 Front Yokes (1 garment, 1 lining) (View 2)

Cut 4 Back Yokes (2 garment, 2 lining)

Cut 4 Pocket Cuffs (2 garment, 2 lining)

Cut 4 Pockets (2 garment, 2 lining)

Skirt Front and Backs: See Skirt Measurement Cutting Chart page 1.

Cut 1 Skirt Front

Cut 2 Skirt Backs

See View 1 and omit angel sleeves. Pocket instructions page 6.

View 3

Dress/Jumper - Square style neckline and mid-length yoke sleeveless with back-wrap closing.

Pattern Layout:

Cut 2 Front Yokes (1 garment, 1 lining) (View 3)

Cut 4 Back Yokes (2 garment, 2 lining)

Cut 4 Pocket Cuffs (2 garment, 2 lining)

Cut 4 Pockets (2 garment, 2 lining)

Skirt Front and Backs: See Skirt Measurement Cutting Chart page 1.

Cut 1 Skirt Front

Cut 2 Skirt Backs

See View 1 and omit angel sleeves. Pocket instructions page 6.

View 4

Dress/Jumper - Princess style neckline, V-seamed mid-length yoke, sleeveless with back-wrap closing. Hemline features- contrasting border.

Pattern Layout:

Garment Fabric

Cut 1 Front Yoke (View 4)

Skirt Front and Backs: See Skirt Measurement Cutting Chart below.

Cut 1 Skirt Front

Cut 2 Skirt Backs

Contrast Fabric

Cut 1 Front Yoke (View 2) for lining

Cut 4 Back Yokes (2 garment, 2 lining)

Skirt Front and Backs Borders: See Skirt Measurement Cutting Chart below.

Cut 1 Skirt Border Front

Cut 2 Skirt Backs

Skirt Measurement Cutting Chart View 4


	Skirt Front (Cut 1)	Skirt Back (Cut 2)
Size 12 mos.	10-1/4" long, 30" wide	10-1/4" long, 22" wide
Size 18 mos.	12" long, 32" wide	12" long, 22" wide
Size 24 mos.	13-5/8" long, 32" wide	13-5/8" long, 22" wide
Size 3	15-1/4" long, 36" wide	15-1/4" long, 27" wide
Size 4	17" long, 38" wide	17" long, 28" wide
Size 5	20-5/8" long, 40" wide	20-5/8" long, 29" wide
Size 6	22-1/4" long, 44" wide	22-1/4" long, 31" wide
Size 7	23-3/4" long, 44" wide	23-3/4" long, 31" wide
Size 8	25-1/4" long, 44" wide	25-1/4" long, 31" wide
Size 9	25-3/4" long, 44" wide	25-3/4" long, 31" wide
Size 10	26-1/4" long, 44" wide	26-1/4" long, 31" wide

3" Border	Skirt Front (Cut 1)	Skirt Back (Cut 2)
Size 12 mos.	7" long, 30" wide	7" long, 22" wide
Size 18 mos.	7" long, 32" wide	7" long, 22" wide
Size 24 mos.	7" long, 32" wide	7" long, 22" wide


4" Border	Skirt Front (Cut 1)	Skirt Back (Cut 2)
Size 3	9" long, 36" wide	9" long, 27" wide
Size 4	9" long, 38" wide	9" long, 28" wide
Size 5	9" long, 40" wide	9" long, 29" wide
Size 6	9" long, 44" wide	9" long, 31" wide

4-1/2" Border	Skirt Front (Cut 1)	Skirt Back (Cut 2)
Size 7	10" long, 44" wide	10" long, 31" wide
Size 8	10" long, 44" wide	10" long, 31" wide
Size 9	10" long, 44" wide	10" long, 31" wide
Size 10	10" long, 44" wide	10" long, 31" wide


12 and 18 months

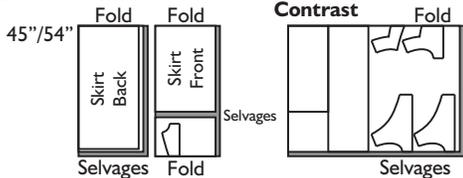


24 months

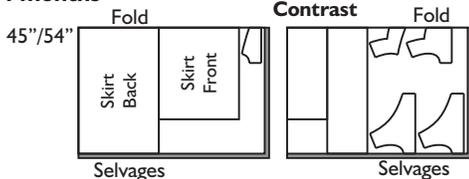

3 and 4 years

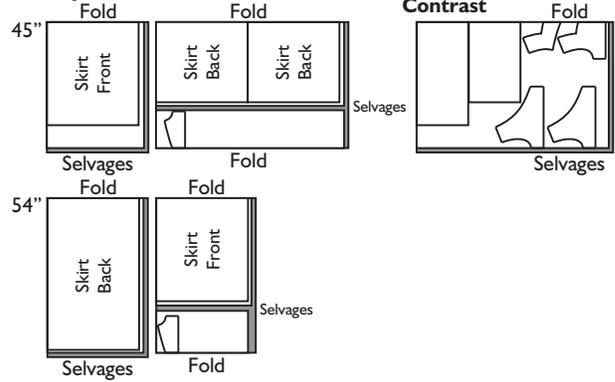


5, 6, 7, 8, 9 and 10 years

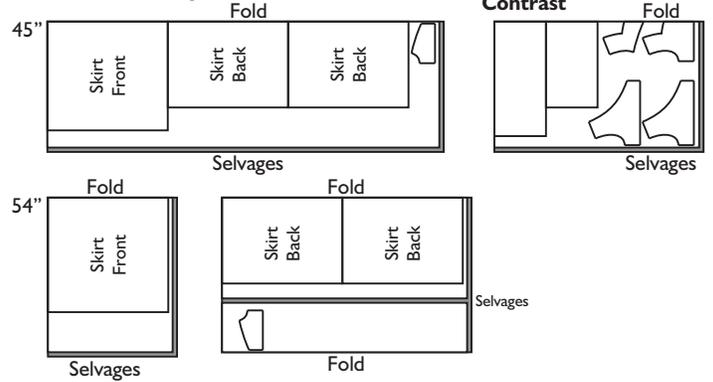

1. Embroidered Yoke: Cut block of fabric larger than yoke top. Transfer embroidery design to fabric. Embroidery block of fabric. Cut yoke top by pattern.

2. V-Seamed Front Yoke: Pin yoke top to yoke bottom at center front. Stitch from center front to armhole edge.

Turn yokes over and stitch from center front to opposite armhole edge.

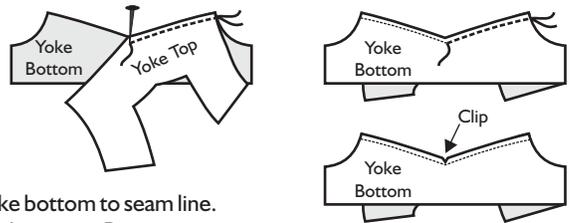


Clip yoke bottom to seam line.

Press yokes open. Press seam up.


Repeat for yoke top and bottom lining.

3. Shoulder Seams: Place back yokes to front yoke at shoulder seams with **right sides together**. Stitch shoulder seams and press seam allowances open. Repeat for yoke lining.


4. Yoke Lining Lower Edge: Press 1/2" to **wrong side** on lower edge of yoke lining.

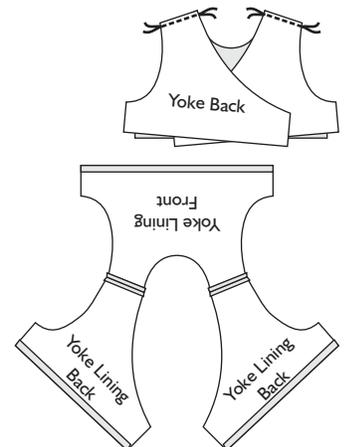


5. Stitch Lining to Yoke: Pin lining to yoke, **right sides together**, with shoulder seams and edges matching. Lower edge of lining is folded up to match seam line of yoke. Stitch neck seam beginning at back yoke edge continuing around neck to opposite back yoke edge. Stitch armholes, underarm seam to underarm seam as shown. Clip corners. Pull back yokes through shoulders. Turn yoke **right side** out. Press.

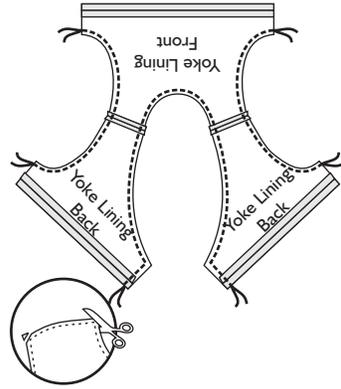

6. Skirt Side Seams and Border: Pin skirt backs to skirt front at side seams with **right sides together**. Stitch seams, press seam allowance open. Repeat for skirt back and front borders. Pin border to skirt, right sides together and sew together using 1/2" seam allowance. Press seam allowance down.

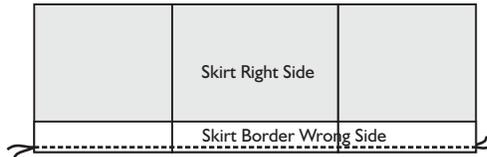

7. Skirt Back Facings: On edge of center skirt back, press 1/4" to **wrong side**. Stitch close to edge. Press facing under 1-1/4" to form facing. Repeat for opposite skirt back.



8. Gathering Skirt: Stitch three rows of long gathering threads along top of front and back skirts.

9. Sew Skirt to Yoke: Pin yoke to skirt **right sides together**, with center front, side seams and back edges aligned. (Do not catch yoke lining.) Adjust gathers and sew yoke and skirt together. Remove gathering threads and press seam up.

10. Pin yoke lining over seam allowance. Hand stitch lining to yoke at gathered seam line.

11. Buttonholes and Buttons: Stitch buttonholes on right back yoke according to buttonhole placement on pattern. Stitch buttons on left back.

12. Hem: Press under 1/2" on lower edge of skirt. Fold up 4" to skirt/border seam and hand stitch in place.

View 5

Dress/Jumper - Round neckline, high-yoke front, smocked front skirt, sleeveless with back-wrap closing.

Pattern Layout:

Cut 2 Front Yokes (1 garment, 1 lining-View 1 Yoke)

Cut 4 Back Yokes (2 garment, 2 lining)

Skirt Front and Backs: See Skirt Measurement Cutting Chart below.

Cut 1 Skirt Front

Cut 2 Skirt Backs



Note: Smocked Front Skirt measurement has extra length added. When assembling the skirts, trim the extra front length.

Sizes 5-10: Add 8-10" strip of fabric on both sides of dress front for sufficient fullness.



Skirt Measurement Cutting Chart View 5

	Skirt Front (Cut 1)	Skirt Back (Cut 2)
Size 12 m	22" long, 38" wide	18-1/4" long, 24" wide
Size 18 m	24" long, 42" wide	20" long, 25" wide
Size 24 m	26" long, 44" wide	21-5/8" long, 25" wide
Size 3	27-1/2" long, 44" wide	23-1/4" long, 27" wide
Size 4	29-1/2" long, 44" wide	25" long, 28" wide
Size 5	33-1/2" long, 44" wide + (2) 8" strips	28-5/8" long, 29" wide
Size 6	35-1/2" long, 44" wide + (2) 8" strips	30-1/4" long, 31" wide
Size 7	37" long, 44" wide + (2) 8" strips	31-3/4" long, 31" wide
Size 8	38-3/4" long, 44" wide + (2) 8" strips	33-1/4" long, 31" wide
Size 9	39-1/2" long, 44" wide + (2) 8" strips	33-3/4" long, 31" wide
Size 10	40-1/2" long, 44" wide + (2) 10" strips	34-1/2" long, 31" wide



12, 18, 24 months; 3 and 4 years

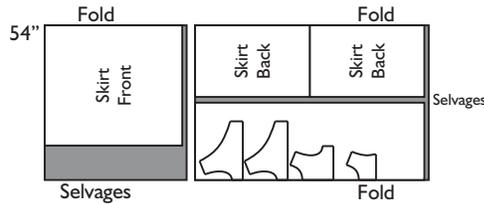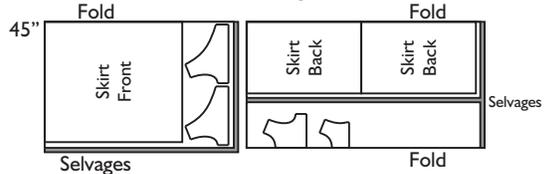

5, 6 and 7 years

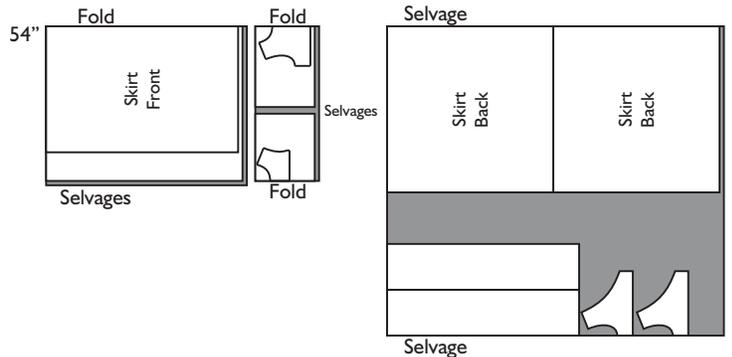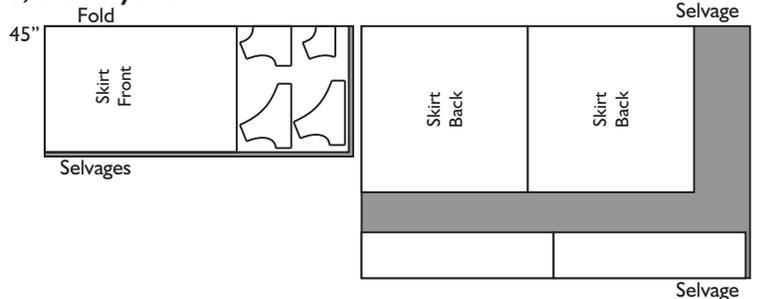

8, 9 and 10 years

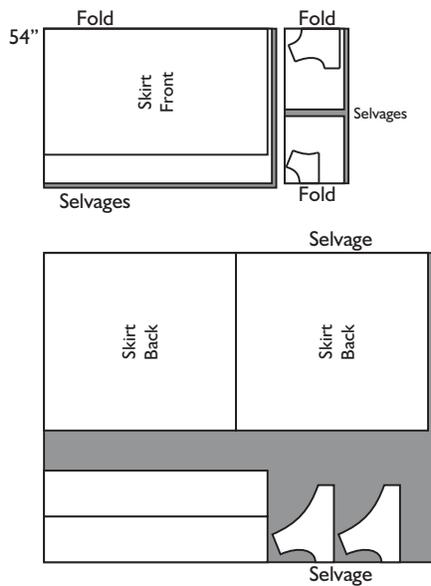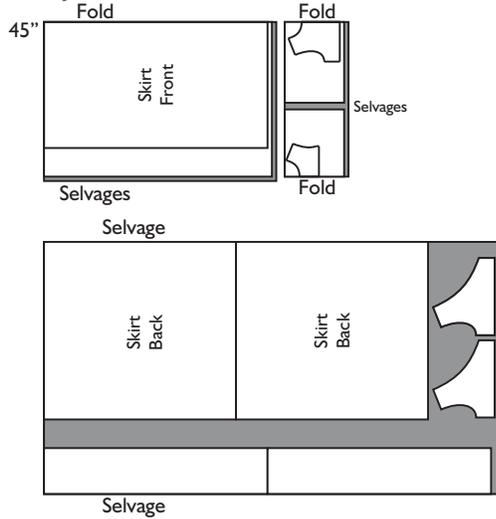

1. Smock Skirt Front: Pleat Dress Front: Roll the dress on dowel and pleat 7 rows with the top row 1/4" from neck edge of fabric. (Top and bottom rows are holding rows. There are 5 rows for smocking.) Tie pleated skirt off to the following measurements:

12 mos.	11"	4 years	13-1/2"	8 years	16-1/2"
18 mos.	11-3/4"	5 years	14"	9 years	17"
24 mos.	12-1/4"	6 years	14-3/4"	10 years	17-3/4"
3 years	12-3/4"	7 years	15-1/2"		


Smock according to smocking diagram or design of your choice. When smocking is complete, machine stitch a line of lengthened stitches along top edge approximately 1/4" above smocking. Use this line of stitching to stitch smocked skirt to top yoke.

Using Armhole Cutting Guide mark armhole on left and right sides of smocked skirt front. Stitch on this line two rows of short machine stitches. Cut armholes from skirt keeping these stitches to hold pleating in place.


2. Smocked Skirt to Front Top Yoke: Pin skirt to yoke, right sides together. Stitch skirt to yoke with skirt side up. Press seam up.

3. Dress Shoulder Seams: Place back yokes to front yoke at shoulder seams with **right sides together**. Stitch shoulder seams and press seam allowances open.

4. Lining Shoulder Seams: Place back yokes to front yoke at shoulder seams with **right sides together**. Stitch shoulder seams and press seam allowances open. Press 1/2" to **wrong side** on lower edge of yoke lining.

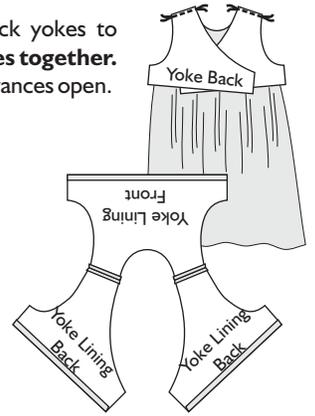


5. Skirt Back Facings: On edge of center skirt back, press 1/4" to **wrong side**. Stitch close to edge. Press facing under 1-1/4". Repeat for opposite skirt back.



6. Sew Back Skirts to Back Yokes: Stitch three rows of long gathering threads along top of back skirts. Pin yoke to skirt **right sides together**, with side edges and back skirt facing edge aligned to yoke seam line. Adjust gathers and sew yoke and skirt together. Remove gathering threads and press seams up.

7. Stitch Lining to Yoke: Pin lining to yoke, **right sides together**, with shoulder seams and edges matching. Lower edge of lining is folded up to match seam line of yoke. Stitch neck seam beginning at back yoke edge continuing around neck to opposite back yoke edge. Stitch armholes, underarm seam to underarm seam as shown. Clip corners. Pull back yokes through shoulders. Turn yoke **right side** out. Press.

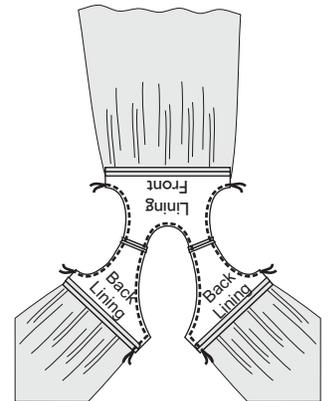

8. Skirt and Yoke Side Seams: Pin skirt backs to skirt front at side seams with **right sides together**. Match yoke underarm seam and yoke edges. Stitch skirt seams and yoke. Stitch seams, press seam allowance open. Pin yoke lining over seam allowance. Hand stitch lining to yoke at gathered seam line.

9. Buttonholes and Buttons: Stitch buttonholes on right back yoke according to buttonhole placement on pattern. Stitch buttons on left back.

10. Hem: Press under 1/2" on lower edge of skirt. Fold up 4" and hand stitch in place.

Pockets Views 2 and 3

Pattern Layout:


Cut 4 Pocket Cuffs (2 garment, 2 lining)

Cut 4 Pockets (2 garment, 2 lining)

1. Cuffs: Pin 1 garment and 1 lining **right sides together**. Stitch along lower edge of cuff as shown. Clip at scallop point. Turn right sides out and press. Repeat for opposite cuff.




2. Pin cuffs to **right sides** of pockets. Baste in place.

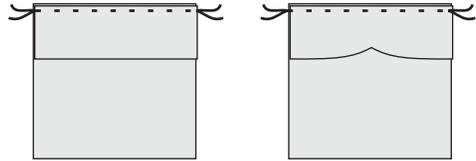


3. Pocket Lining: Place pocket and lining **right sides together** and stitch around edges leaving an opening in lower edge for turning.


4. Trim seam allowances and clip corners. Turn pockets and press. Hand stitch opening closed. Position pocket on dress and stitch in place.



Smocking Design Sizes 12 - 24 months

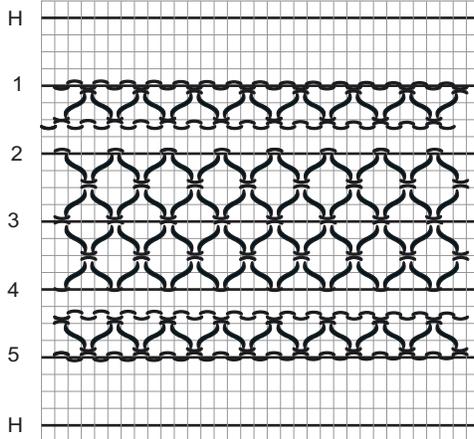

Smocking Design Sizes 3 - 10 years

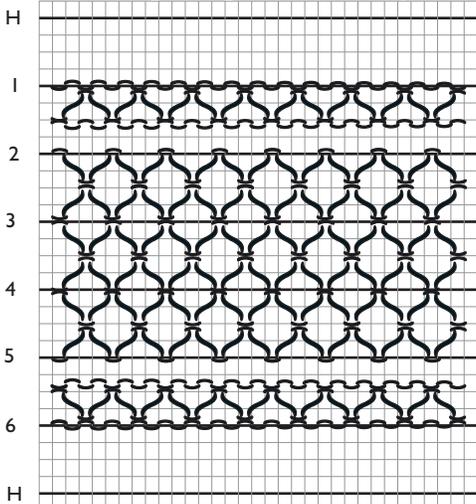

Embroidery

Spray starch areas to be embroidered. Lightly trace embroidery design on right side of dress.

Stems - Stem Stitch

Leaves - Lazy Daisy Stitch

Flowers - Bullion Rose

Stem Stitch: Come up at A, pulling thread through. Go down at B, back up at C, pull the thread through. Go down at D, back up at B, pull thread through. Continue stitching, keeping the spacing small and even. While working the stitches the thread should always be held above the stitches.



Lazy Daisy Stitch: Come up at A and form a loop. Go down at B (as close to A as possible, but not into it) and emerge at C bringing the needle tip over the thread. Go down at D making a small anchor stitch.



Bullion Rose

Bud Center: Round 1 work one 6-wrap bullion knot. Round 2 work two 8-wrap bullion knots, around first knot.

Petals: Round 3 work one 11-wrap bullion knot that cups the lower portion of center bud. Work five 11-wrap bullion knots, overlapping the last bullion knots by one-third. Round 4 Work one 12-wrap beginning at the lower left; work 8 more 12-wrap bullion knots to complete the rose.




Jenna Leigh

Finished Garment Lengths

(Top of Shoulder to Lower Edge of Hem. Hem is located approximately mid-calf. Garment length may be adjusted according to your child.)

Size 12 months	20"
Size 18 months	22"
Size 24 months	24"
Size 3 years	26"
Size 4 years	28"
Size 5 years	32"
Size 6 years	34"
Size 7 years	36"
Size 8 years	38"
Size 9 years	39"
Size 10 years	40"



Piping How To's

Do you think using piping is too hard? Have you never used it in your garments? Or have you never made your own piping?

I suggest you try on your next project. It's not as difficult as you may think and there are several very good reasons to use piping.

What size piping do you use?

In children's clothes use "small" piping. The cord is approximately 1/16" in diameter. This is easy to find in your local fabric shops that carry heirloom and smocking fabrics. This is also widely available at the great selection of internet fabric shops. The larger size piping is proportionally too large for children's clothing.

What cord do I use when making my own piping?

Ask for uncovered piping cord at your local shop or internet shop.

Why use piping?

Most often piping is used to add contrast to the garment. (Around the collar, cuff, across the yokes, around a sleeveless armhole - just about any seam.)

Piping adds stability to the seam. Even if you use the same fabric for piping, the finished seam is much more professional looking. We all want our garments not to look "homemade" but rather "handmade"! Piping stabilizes a seam including bias seams, yoke seams or a seam that is curved.

How to Make Piping

Cut fabric strips on 45 degree angle.

The width of the strips depend on the seam width of the garment you are making.

When purchasing fabric just for piping 1/3 yard will make lot's of piping without too many seams to join the strips together.

Strip widths: 1/4" seam - Cut fabric strips 5/8" wide
3/8" seam - Cut fabric strips 1" wide
1/2" seam - Cut fabric strips 1-1/4" wide
5/8" seam - Cut fabric strips 1-1/2" wide

Note: The width of the strips is larger than the finished size of the piping. This allows extra space for the piping cord.

Roughly measure where you want to place the piping to determine how much piping to make. A little extra is always much better than not enough.

Place the strips, right sides together, at a 90 degree angle. Stitch from intersection of fabrics to intersection of fabrics.

Trim the seams (use pinking shears if you have them, this will help make the seam less noticeable.)

Press seams open.

Fold the fabric strip, **wrong sides together**, with the cord at the fold line.




Use piping foot or zipper foot to straight stitch next to the cord using lengthen stitch length.

Note: When the piping is applied to the garment, set the needle position to stitch one or two positions closer to the cording. This will eliminate the first stitches showing on the right side of the garment.

Place the piping on the **right side** of the garment with the piping stitching line on the seam line of the garment. I prefer to hand baste the piping in place taking care not to stretch the piping. Clip the piping to the stitching line to make sharp corners. Machine baste the piping to garment.

Place the corresponding garment piece to the garment/piping with piping sandwiched between. Turn the pieces with the garment/piping side up so you can use the machine basting line to stitch by. Adjust the needle one position closer to the cord and stitch garment pieces together.



Note: You may chose to over cut the size of the strips and after they are seamed together and the piping has been inserted inside the strip, then to cut the finished piping to desired side.

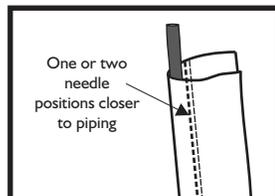

There are new piping rules on the market for just this task. The piping is placed in the a selected groove of the ruler and then a rotary cutter is used to trim the edge of the piping.

I usually trim the edge of piping with pinking shears when stitching a curved seam. This allows the piping to lay smoothly without clipping the piping to the seam line.

Tip: To reduce bulk in seam lines at ends of piping, gently pull the cord out of the piping and clip the cord just short of the seam line.

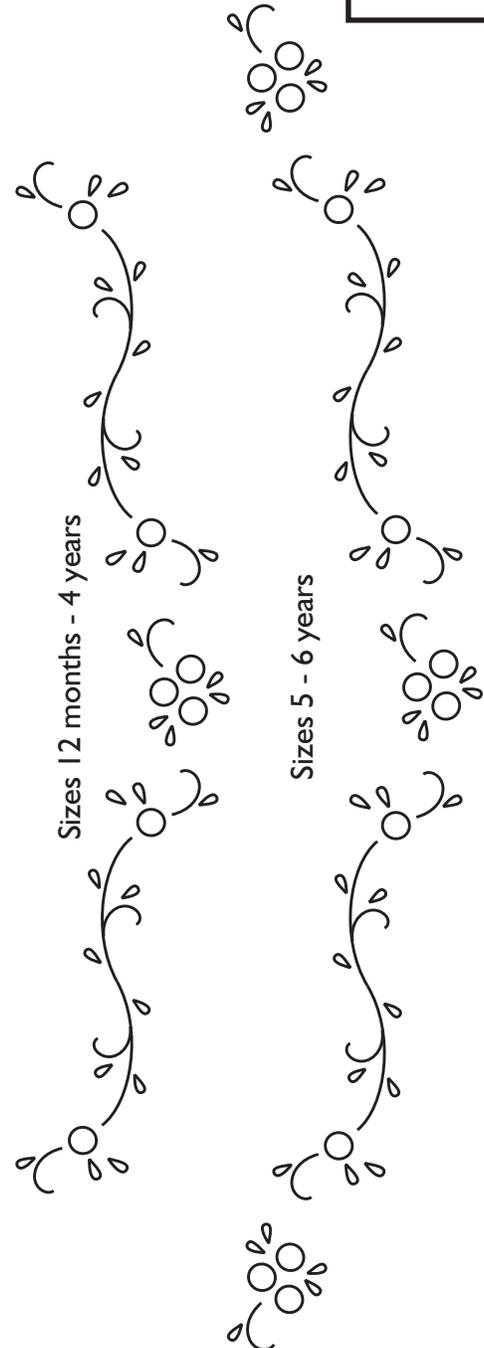


Jenna Leigh

Summer Dress and Jumper Collection

Easy to make and fun to wear dresses/jumpers with back-wrap button closing.
Detailed instructions and illustrations are included for quick and easy construction.



View 1



View 2



View 3



View 4



View 5



Back

View 1 - Round neckline with angel sleeves. (Ideal for machine embroidered initials.)

View 2 - Square neckline with button flap pockets.

View 3 - Sweetheart neckline with matching pockets.

View 4 - Sweetheart neckline with contrast v-style yoke and contrast border hemline.

View 5 - Round neckline and high yoke and smocked front skirt. (Geometric smocking design included.)

Bonus: Piping How To's and How to Make Piping!

	12 months	18 months	24 months	3 years	4 years
Dress Views 1, 2 and 3					
45" Fabric With/Without Nap	1-7/8 yards	2 yards	2-1/4 yards	2-5/8 yards	2-3/4 yards
54" Fabric With/Without Nap	1-5/8 yards	1-3/4 yards	1-7/8 yards	2-1/8 yards	2-5/8 yards
Dress View 4					
45" Fabric With/Without Nap	5/8 yard	3/4 yard	1 yard	1-1/2 yards	1-5/8 yards
54" Fabric With/Without Nap	5/8 yard	3/4 yard	1 yard	1-1/2 yards	1-5/8 yards
Contrast Fabric yokes and skirt border					
45" Fabric With/Without Nap	7/8 yard	7/8 yard	1 yard	1 yard	1 yard
54" Fabric With/Without Nap	7/8 yard	7/8 yard	1 yard	1 yard	1 yard
Dress View 5					
45" Fabric With/Without Nap	2 yards	2-1/8 yards	2-1/4 yards	2-1/2 yards	2-5/8 yards
54" Fabric With/Without Nap	1-3/4 yards	1-7/8 yards	2-1/8 yards	2-1/4 yards	2-1/4 yards

Standard Body Measurements:

	12 months	18 months	24 months	3 years	4 years
Chest	18-1/2"	19-1/2"	20"	21"	22"
Waist	19"	19-1/2"	20"	20-1/2"	21"
Hip	19"	20"	21"	22"	23"

Suggested Fabrics: Medium to lightweight fabrics including cotton, linen, novelty cotton prints, gingham, seersucker, chambray, poplin and pique.

Notions: Sewing thread to match fabrics. All Views - 2 (1/2-3/4") buttons. View 2 requires 2 additional buttons for pockets.

Janis Barham Shelton
1999 Sam Lackey Road
Toomsba, MS 39364
Phone 601-679-5933
Email: janis05@bellsouth.net
www. BonnieBlueDesigns.com
Facebook: Bonnie Blue Designs

Visit our website for sample designs!

Bonnie Blue Designs®

©Copyright Bonnie Blue Designs® 2011


Made in U.S.A.




Jenna Leigh

Summer Dress and Jumper Collection


Easy to make and fun to wear dresses/jumpers with back-wrap button closing.
Detailed instructions and illustrations are included for quick and easy construction.



View 1



View 2



View 3



View 4



View 5



Back

View 1 - Round neckline with angel sleeves. (Ideal for machine embroidered initials.)

View 2 - Square neckline with button flap pockets.

View 3 - Sweetheart neckline with matching pockets .

View 4 - Sweetheart neckline with contrast v-style yoke and contrast border hemline.

View 5 - Round neckline and high yoke and smocked front skirt. (Geometric smocking design included.)

Bonus: Piping How To's and How to Make Piping!

	5 years	6 years	7 years	8 years	9 years	10 years
Dress Views 1, 2 and 3						
45" Fabric With/Without Nap	3 yards	3-1/4 yards	3-3/8 yards	3-5/8 yards	3-3/4 yards	3-3/4 yards
54" Fabric With/Without Nap	2-3/4 yards	3-1/4 yards	3-3/8 yards	3-5/8 yards	3-3/4 yards	3-3/4 yards
Dress View 4						
45" Fabric With/Without Nap	2 yards	2-1/8 yards	2-1/4 yards	2-1/2 yards	2-5/8 yards	2-5/8 yards
54" Fabric With/Without Nap	1-7/8 yards	2 yards	2-1/8 yards	2-1/4 yards	2-3/8 yards	2-3/8 yards
Contrast Fabric yokes and skirt border						
45" Fabric With/Without Nap	1 yard	1-1/8 yards	1-1/4 yards	1-1/4 yards	1-3/8 yards	1-3/8 yards
54" Fabric With/Without Nap	1 yard	1-1/8 yards	1-1/4 yards	1-1/4 yards	1-3/8 yards	1-3/8 yards
Dress View 5						
45" Fabric With/Without Nap	3-1/2 yards	3-1/2 yards	3-5/8 yards	3-3/4 yards	3-7/8 yards	3-7/8 yards
54" Fabric With/Without Nap	3 yards	3-1/8 yards	3-1/4 yards	3-3/8 yards	3-5/8 yards	3-5/8 yards

Standard Body Measurements:

	5 years	6 years	7 years	8 years	9 years	10 years
Chest	23"	24"	25"	26-1/2"	28"	29-1/2"
Waist	21-1/2"	22"	22-1/2"	23"	24"	25"
Hip	24"	25"	26-1/2"	28"	30"	32"

Suggested Fabrics: Medium to lightweight fabrics including cotton, linen, novelty cotton prints, gingham, seersucker, chambray, poplin and pique.

Notions: Sewing thread to match fabrics. All Views - 2 (1/2-3/4") buttons. View 2 requires 2 additional buttons for pockets.

Janis Barham Shelton
1999 Sam Lackey Road
Toomsba, MS 39364
Phone 601-679-5933
Email: janis05@bellsouth.net
www. BonnieBlueDesigns.com
Facebook: Bonnie Blue Designs

Visit our website for sample designs!

Bonnie Blue Designs®

©Copyright Bonnie Blue Designs® 2011

Made in U.S.A.

